FICHE TECHNIQUE

LEDBK24LA LED BULKHEAD LIGHT 24W

lazio® SMART LED

Smart RGB
Smart APP +Remote



Léclairage de cloison est un luminaire sûr et fable, Résistant à leau et àlhumidité,durable et efficace Imperméable àlleau pour éviter lescourts-circuits causés par la pluie Pénetration, matériau avec substraten aluminiumPCB+PC Boitier en plastique pour une excellente resistance à la chaleur qui aide à prolonger Durée de vie≥50000heures.

IP	IK		Garantie	lm/W	PF		Flicker-Free		CCT	DIM			ENEC	STOCK
IP54	K04	120	2 ANS	jusqu'à 100	0.6	50,000H	OUI	90	3CCT	NON	SMD	16	NON	OUI

Specifications technique

Reference	LEDBK24LA
ETN code	6114561252243
ETIM code	

Specifications électrique

Puissance système (W)	24
Puissance led (W)	24
Tension (Vac)	170-265Vac
Fréquence (Hz)	50/60
Contrôleur inclusoui	oui
Contrôleur in/externe	interne
Drive marque	LAZIO
Driver référence	
Dimmable	NON
Flicker freely	oui
Power factor	0.6
Câble de connexion	0.16m
Driver output (V)	144
Driver output (mA)	200
Classe d'isolation	I
Classe d'énergie	A^+
Inrusch current driver	2A

Garantie et certification

Durée de vie (H)	50.000H
Garantie (ans)	2
ENEC	NO

Propriétés photométriques

Angle rayonnement (°)	120
Temp.de couleur (K)	7000K/4000K/3000K
Rendu de couleurs CR	90
UGR	16
Solidité de couleurs	3
Sortie de lumen (Lm)	2400
Lm/W	100
HS code	9405110000
Luce led	SMD
Type led	2835
Nombre de puce led	179

Dimensions et caractéristiques du matériau

Dimensions(LxWxH)	270*47*142mm
Poids(kg)	0.43
Couleur	White/Black/Gold/Slivery/Ceramic
Temp.de travail(℃)	-20~+45
Valeur IP	IP54
Valeur IK	IK04
Résistant aux UV	oui
Résistant à l'eau de mer	no
UI94	
Nombre en vrac	20
Nomber sur palette	
Quantité minimum	1
Article en stock	oui



Smart RGB
Smart APP +Remote



FICHE TECHNIQUE

LEDBK24LA LED BULKHEAD LIGHT 24W

16 Million Colors

SMART RGB

SURFACE LIGHT

Product features:

- Intelligent control
- Control mainstream graffiti apps, compatible with Google and Amazon smart speakers, as well as most domestic smart speakers;
- The remote control adopts 2.4G communication, which has superior encryption compared to 433 and enhances stability;
- Equipped with RGB ambient lights, it also supports both rainbow and full-color modes
- High stability, non-isolated independent power supply;
- Flicker-free.

Application

- Bedroom
- Living room
- Restaurant
- Tea bar, hotel lights, hallway






Installation pictures


POWERED BY
TUYA APP

Remote control and distribution network instructions

1. Matching remote control: Within 1 minute after the light is powered on, long press the No.1 button on the remote control for 6 seconds, and then the remote control and the light will be successfully paired. If it fails, you can try multiple times.
2. Via remote control network pairing: Long press the No. 7 button on the remote control for 5 seconds to enter the network pairing mode. At this time, the lights will start flashing, and you can pair the network through the mobile phone APP.
3. Switch Pairing Mode: Toggle switch 6 times (1 press/sec). Light flashes for APP network pairing.

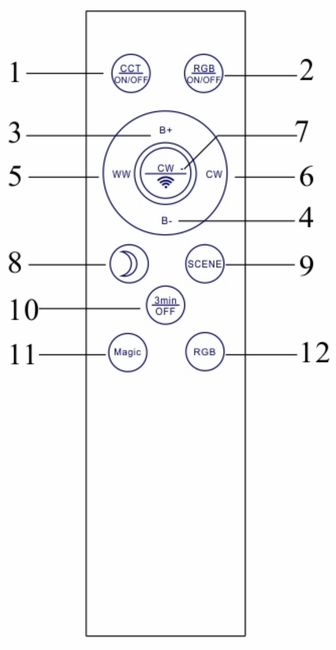

1.Short press :Central light ON/OFF,Long press remote control pairing
2.Short press :RGB ON/OFF
3.Short press :Brightness+
4.Short press :Brightness-
5.Short press :Brightness+
6.Short press :Brightness-
7.Long press :Pair with a phone
8.Short press :Night light
9.Short press :25%-50%-100% quick brightness switching (cyclic)
10.Short press :Countdown to 3 minutes, turn off the lights
11.Short press :12 kinds of iridescent colors
12.Short press :Colorful switching

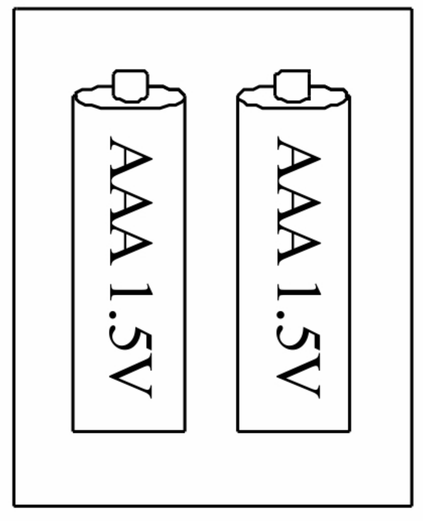


The remote control requires 2 AAA 1.5 batteries


FICHE TECHNIQUE

LEDBK24LA LED BULKHEAD LIGHT 24W

Température de couleurdistributio

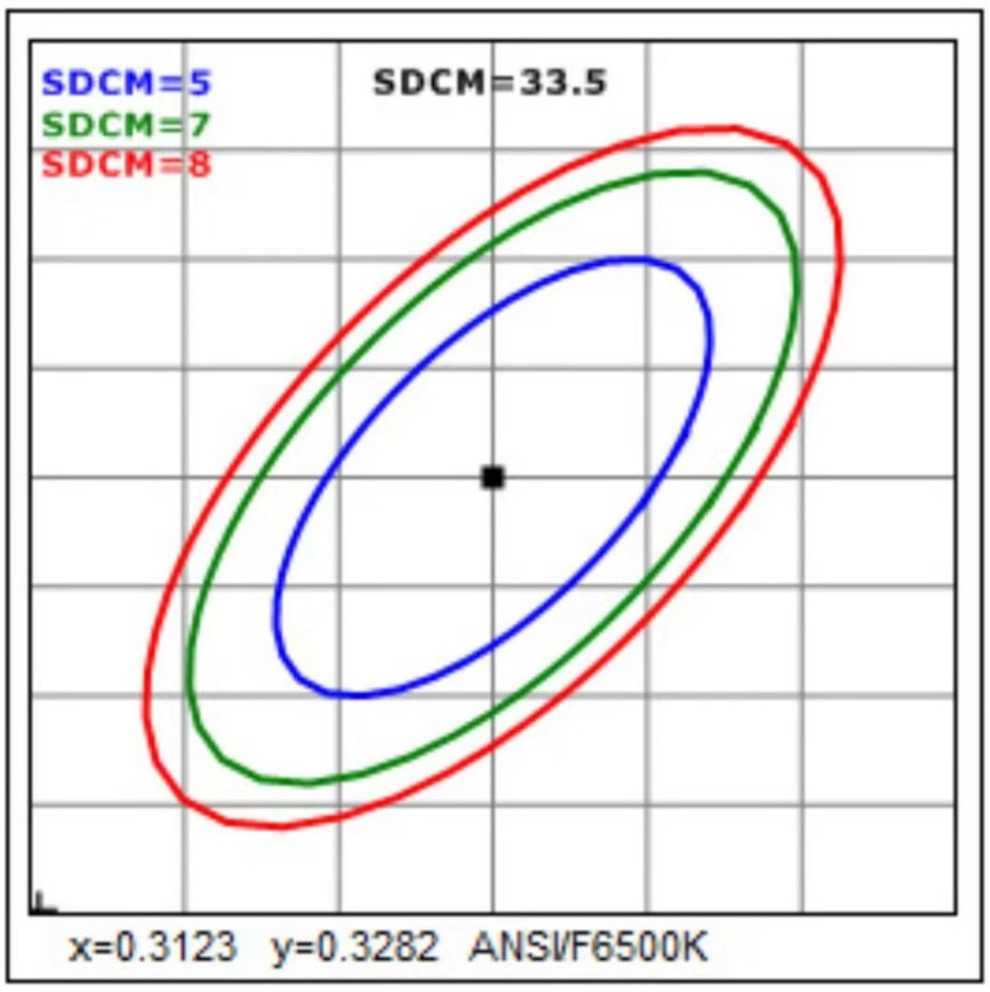


Spectrum distribution

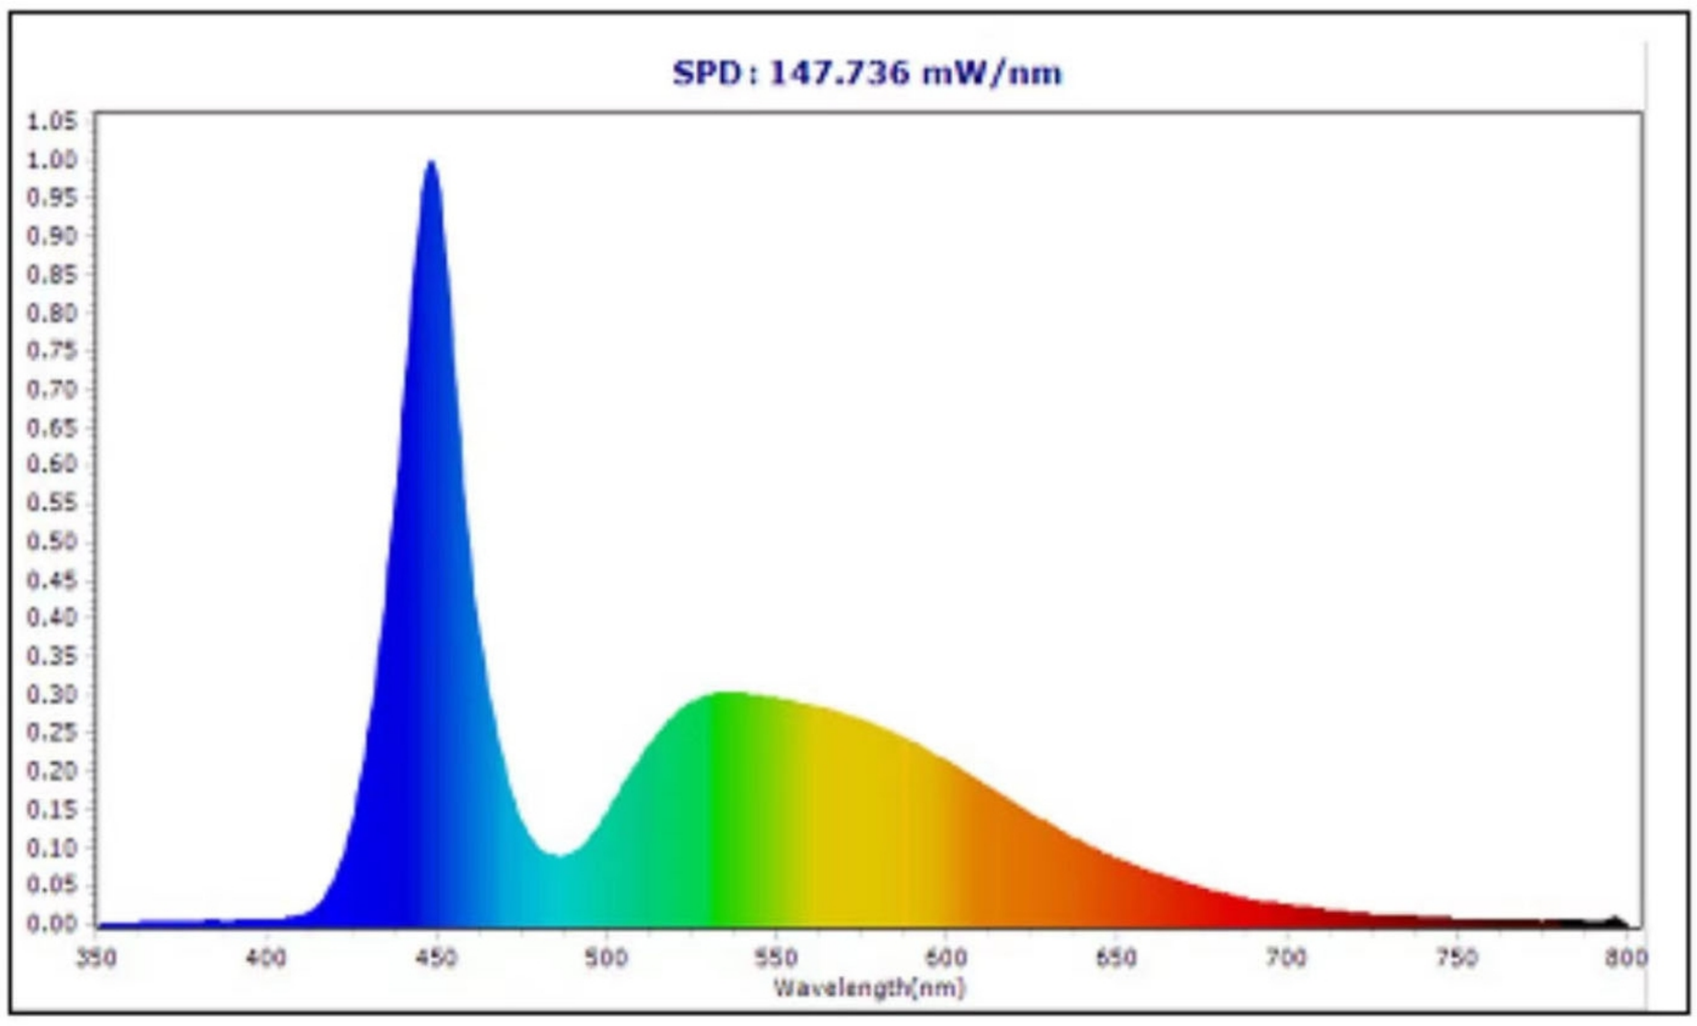

FICHE TECHNIQUE

LEDBK24LA LED BULKHEAD LIGHT 24W

Dimensions

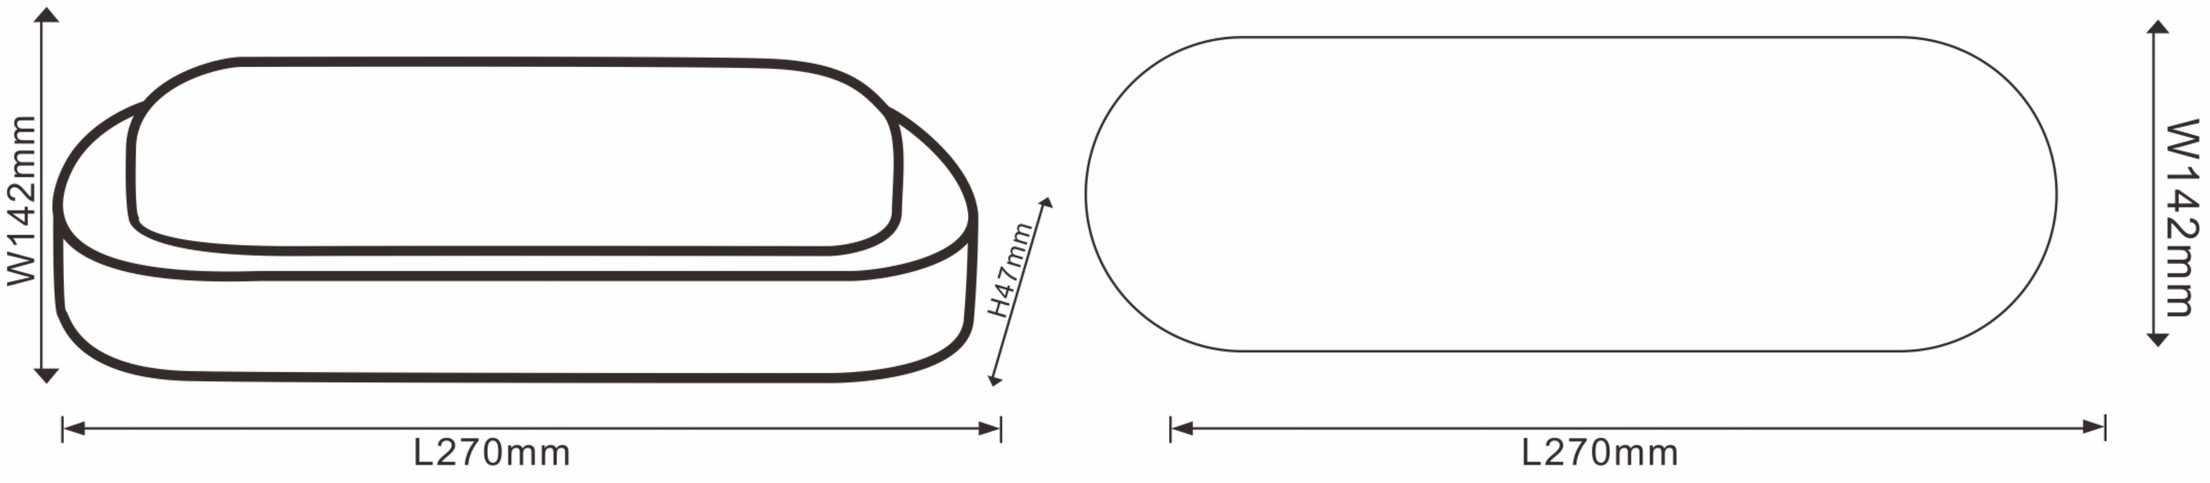

Schèma de cablage





